



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00302526.9

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

05/01/01



THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.: 00302526.9
Demande n°:

Anmeldetag:
Date of filing: 28/03/00
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Improved method of decoding uplink status flags for RT-EGPRS users

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
H04L12/56

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

IMPROVED METHOD OF DECODING UPLINK STATUS FLAGS FOR RT-EGPRS USERS

5

This invention relates to a method of decoding Uplink Status Flags (USFs) in a telecommunications service such as the Real-Time General Packet Radio Service (RT-GPRS).

Digital mobile communication systems for voice, such as the Global System for
10 Mobile Communications (GSM) and Digital Advanced Mobile Systems (DAMPs) have expanded very quickly in recent years. Systems for data, such as the GPRS and Enhanced Data rate for GSM Evolution (EDGE) and Universal Mobile Telecommunications System (UMTS), are being developed rapidly, as wide acceptance of the Internet creates a substantial demand. Voice over the fixed packet switched
15 network is being developed and it is expected that there will be an increasing volume of voice traffic using Internet Protocol (IP) networks. Potential demand for voice services over GPRS/Enhanced GPRS (EGPRS)/EDGE is expected to increase.

In GPRS and EGPRS/EDGE, in current arrangements, a Radio Link Control/Medium Access Control (RLC/MAC) block is interleaved over four Time
20 Division Multiple Access (TDMA) bursts in four consecutive time frames. Consequently the USFs are also interleaved over four TDMA bursts, and a USF field cannot be decoded until all four TDMA bursts are received. This leads to a twenty millisecond USF field decoding delay, which in a voice service may not be acceptable.

It has been proposed in a co-pending patent application of the current applicant
25 that one or more USF fields can be sent in one RLC/MAC block in the downlink, depending on the scheme to transmit such blocks. It has also been proposed in another co-pending application of the current applicant that the USF fields are transmitted only in the first burst, so that the polling algorithm is optimized and the mobile reply time is reduced. If the mobile reads its own USF in the first burst, then in the same twenty
30 millisecond period (if the mobile is active) the mobile sends a voice packet on the corresponding uplink traffic channels. Unfortunately, when the USF fields are moved to the first burst, the interleaving depth is reduced from four bursts to one burst. This degrades the Block Error Rate (BLER) of the USF by about six dB.

This is illustrated in Figure 1 which is a plot of the BLER of the USF against

Eb/No using block code (36, 3); Typical Urban (TU) 50 is used and there is no Frequency Hopping (FH). The line E on Figure 1 is a plot for a four burst interleaving in EDGE 8 PSK (Phase Shift Key) and the line V is a plot for voice over EDGE 8 PSK with one burst interleaving. The loss of about 6 dB is clear.

- 5 It is an object of the invention to provide a method to offset this loss due to reduced interleaving depth.

According to the invention, in the general packet radio service telecommunications system, a method of decoding uplink status flags having reduced interleaving depth in a radio link control/medium access control block is characterized

- 10 by:-

selecting a first plurality of uplink status flags and providing all of the flag bits in the first block of said group of bursts;

- selecting a second plurality of uplink status flags and providing a predetermined number of bits of the uplink status flags in the first burst of said group of bursts and the
15 remaining bits in the other bursts of the group.

- Also according to the invention, a general packet radio service system comprising a plurality of base transceiver stations; a plurality of radio network controllers; and a core network; characterized in that in each base transceiver station is arranged to code uplink status flags for a first group of voice users by providing all of
20 the bits of the uplink status flag in the first burst of said radio link control/medium access control block, and for a second group of voice users by providing a predetermined number of bits in the first burst of said radio link control/medium access control block and the remaining bits in subsequent bursts.

- Further according to the invention, a mobile terminal in a RT-EGPRS system in
25 which each mobile terminal is associated with a first or a second group of users, and is arranged to perform an autocorrelation on a predetermined number of bits in a uplink status flag received from the first burst in said radio link control/medium access control block, whereby said terminal determines whether that uplink status flag is associated with the same group of voice users as said terminal.

- 30

In the drawings, Figure 1 illustrates the problem to be solved. The invention

will be described by way of example only with reference to Figures 2 to 5 in which :-

Figure 2 is a highly schematic illustration of a part of the general packet radio service system;

Figures 3a, 3b and 3c are three different autocorrelations of the first nine bits of uplink status flags;

Figure 4 shows a correlation of the whole 36 bits of uplink status flags; and

Figure 5 illustrates performance of old and new coding methods.

In Figure 2, in the GPRS 10, a Mobile User (MU) 12 is in a telecommunications cell controlled by a Base Transceiver Station (BTS) 14 which in turn is controlled by a Radio Network Controller 16 (RNC). The RNC is connected to a Core Network (CN) 18. The BTS 14 receives voice signals from the MU 12, forms them into RLC/MAC blocks, and the blocks are transferred through the GPRS 10 to the other party to a call.

Table I illustrates block coding schemes currently used.

TABLE I

USFs before block encoder																																
20	000	USF1																														
	001	USF2																														
	010	USF3																														
	011	USF4																														
	100	USF5																														
	101	USF6																														
	110	USF7																														
	111	USF8																														
25																																
USFs after block encoder																																
30	Usf1 = [0 0];																															
	Usf2 = [1 1 1 1 0 0 0 0 1 1 1 1 0 0 0 0 1 1 1 1 1 1 1 0 0 0 1 1 1 1 1 0 0 0 1 1];																															
	Usf3 = [1 1 1 0 0 1 1 1 1 0 1 1 1 0 1 1 1 0 0 1 1 0 0 0 0 1 1 0 1 1 0 0 0 1 1 0 0];																															
	Usf4 = [1 0 0 1 1 1 1 0 0 1 1 0 0 0 0 0 1 1 1 0 1 1 1 0 1 1 1 0 0 1 0 0 1 1 1 1];																															
	Usf5 = [0 0 0 1 1 0 0 1 1 0 0 1 0 1 1 0 1 0 1 0 0 0 0 1 1 0 1 1 1 1 1 1 1 1 1 0];																															
	Usf6 = [1 1 0 1 0 1 0 1 1 0 0 0 1 1 0 1 0 1 0 1 1 1 0 1 0 1 1 1 0 0 1 0 1 0 1 1];																															
	Usf7 = [0 0 1 0 0 1 1 0 1 1 0 1 1 1 1 1 1 0 1 1 0 1 0 0 0 1 0 0 1 1 1 0 1 0 0 0];																															
	35	Usf8 = [0 1 1 0 1 0 1 1 1 0 1 0 1 0 1 1 1 1 0 0 0 1 1 1 1 1 0 0 1 0 0 1 0 0 1 1].																														

Considering now only the first nine bits of each encoded USF; these are given in Table II.

TABLE II

	Usfb1 = [0 0 0 0 0 0 0 0];
5	Usfb2 = [1 1 1 1 0 0 0 1];
	Usfb3 = [1 1 1 0 0 1 1 0];
	Usfb4 = [1 0 0 1 1 1 1 0];
	Usfb5 = [0 0 0 1 1 0 0 1];
	Usfb6 = [1 1 0 1 0 1 0 1];
10	Usfb7 = [0 0 1 0 0 1 1 0];
	Usfb8 = [0 1 1 0 1 0 1 1].

The eight USFs can be formed into two groups; one group comprises uncoded USFs of which the last bit is one; this group will be referred to as the EGPRS group.

- 15 The other group comprises uncoded USFs of which the last bit is zero (See Table I) and this group will be referred to as the RT-EGPRS.

The two groups are shown in Table III.

TABLE III

20	EGPRS	001	USF2
		011	USF4
		101	USF6
		111	USF8
	RT-EGPRS	000	USF1
25		010	USF3
		100	USF5
		110	USF7

In the inventive arrangement, the system shown in Figure 2 is arranged so that, when
30 the RLC/MAC blocks are formatted, the EGPRS USFs are interleaved in four consecutive bursts, as in the prior art arrangement. However, the RT-EGPRS USFs are all placed in the first burst.

On receipt of a first burst, a mobile user 12 in the EGPRS/RT-EGPRS system performs an autocorrelation of the first nine bits of the received USF, to determine
35 whether the USF is directed to EGPRS users or to RT-EGPRS users; autocorrelation of the nine bits will provide a definite peak at the relevant USF. The user 12 can then identify which of the eight USFs is present.

Figures 3a, 3b and 3c are examples of autocorrelation functions for the eight

USFs. In Figure 3a there is a marked peak for USF1, indicated on the graph by a diamond shape, while the other seven USFs show either no peak or much lower peaks.

In Figure 3b, the peak is associated with USF2, indicated by a square; and in Figure 3c the peak is associated with USF3 indicated by a triangle.

- 5 If the user 12 is an RT-EGPRS user, and identifies one of USFs 1, 3, 5 or 7, the mobile then looks for the remaining 27 bits in the first burst. If the user 12 is an EGPRS user and identifies one of the USFs 2, 4, 6 or 8, the mobile then looks for the remaining 27 bits in the next 3 bursts.

As a further confirmation measure, both types of users can be arranged to
10 perform a further correlation using the full 36 bits of the relevant USF sequence. A typical 36 bit correlation is shown in Figure 4; the peak for USF 1, indicated by diamonds, is illustrated. This second correlation is used as confirmation of the earlier 9-bit correlation.

Once the RT-EGPRS user mobile 12 has recognized its USF with certainty, the
15 last bit is known. Block decoding apply (36, 2) instead of (36, 3) as in the prior art, can be used. Such block coding is described in our co-pending patent application number filed on even date.

Figure 5 is a plot of BLock Error Rate(BLER) against E_s/N_0 in dBs for four block decoding methods; block decoding (36, 3) minimum distance 20 is indicated by
20 the line 20; (36, 2) minimum distance 20 is indicated by the line 22; (48, 3) minimum distance 27 is indicated by the line 24; and (48, 2) minimum distance 27 is indicated by the line 26.

Using the same code words, a gain of about 4 dBs can be achieved by using
(36,2) instead of (36, 3) block decoding. If new block code is introduced and (48, 2)
25 block code with the same minimum distance as (48, 3) code can be used with the same minimum distance, then a gain of about 5dBs can be achieved in comparison with the (36, 3) block code. A major part of the degradation of the BLER has been compensated.

This Page Blank (uspto)

CLAIMS

1 In the general packet radio service telecommunications system, a method of decoding uplink status flags having reduced interleaving depth in a radio link control/medium access control block is characterised by:-

5 selecting a first plurality of uplink status flags and providing all of the flag bits in the first block of said group of bursts;

selecting a second plurality of uplink status flags and providing a predetermined number of bits of the uplink status flags in the first burst of said group of bursts and the remaining bits in the other bursts of the group.

10 2 A method according to Claim 1 in which the first plurality of uplink status flags all have a first common feature and the second plurality of uplink status flags all have a second common feature.

3 A method according to Claim 2 in which the first common feature is that the third bit of an uncoded uplink status flag is a one and the second common feature is
15 that the third bit of an uncoded uplink status flag is a zero.

4 A method according to any preceding Claim in which one plurality of uplink status flags is associated with a first group of mobile users and the other plurality of uplink status flags is associated with a second group of mobile users.

5 A method according to Claim 4 in which the first and second groups of
20 mobile users are respectively users in the Enhanced General Packet Radio Service and in the Real Time Enhanced General Packet Radio Service.

6 A General Packet Radio Service comprising a plurality of base transceiver stations 14; a plurality of radio network controllers 16; and a core network 18; characterised in that each base transceiver station 14 is arranged to decode uplink
25 status flags for a first group of voice users by providing all of the flag bits in the first burst of the radio link control medium access control block, and for a second group of voice users by providing a predetermined number of bits in the first burst of the radio link control medium access control block and the remaining bits in subsequent bursts.

7 A mobile terminal for use in a system according to Claim 6 in which
30 each mobile terminal is associated with a first or a second group of voice users, and is arranged to perform an autocorrelation on a predetermined number of bits in a uplink

status flag received from the first burst of the radio link control medium access control block, whereby said terminal determines whether that uplink status flag is associated with the same group of voice users as said terminal.

7 A mobile terminal according to Claim 6 in which said predetermined
5 number of bits is nine.

8 A mobile terminal according to Claim 6 or Claim 7 in a first group and arranged so that, on determination that a received uplink status flag is associated with the first group, the terminal receives the remaining bits of the uplink status flag from said first block.

10 9 A mobile terminal according to Claim 6 or Claim 7 in the second group and arranged so that, on determination that a received uplink status flag is associated with the second group, the terminal received the remaining bits of the uplink status flag from the subsequent blocks of said group.

10 10 A mobile terminal according to Claim 8 or Claim 9 further arranged to
15 perform a further autocorrelation on the whole number of received uplink status flag bits

ABSTRACT



**IMPROVED METHOD OF DECODING UPLINK STATUS FLAGS
FOR RT-EGPRS USERS**

5


10

In the GPRS, a method of decoding uplink status having reduced interleaving depth in a RLC/MAC block is proposed; for RT-EGPRS users, all of the uplink flag bits are provided in the first burst of the four bursts; and for EGPRS users, nine bits of the uplink status flags are provided in the first burst of the RLC/MAC block and the remaining bits in the next three bursts. On receiving the first nine bits, a mobile performs an autocorrelation to identify the USF whether it belongs to the EGPRS or to the RT-EGPRS group.

This Page Blank (uspto)

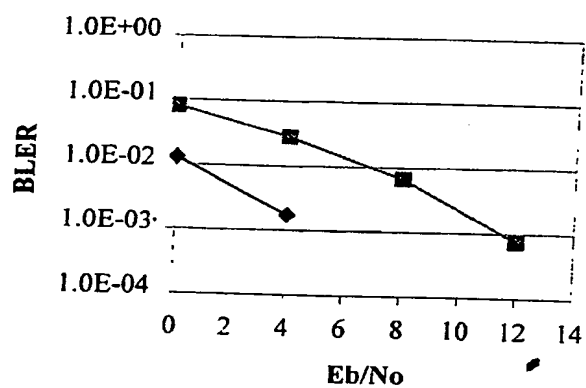FIG. 1

10 →

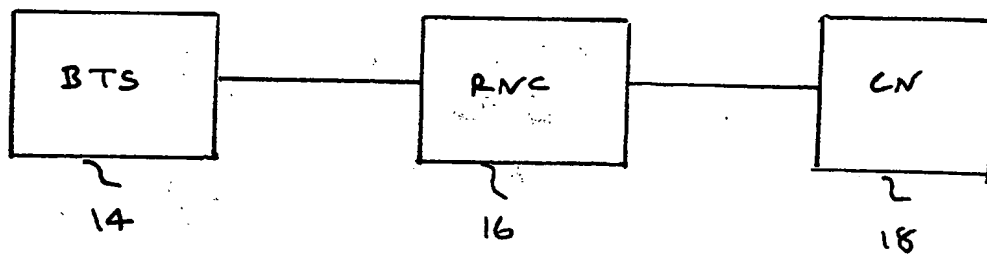FIG. 2

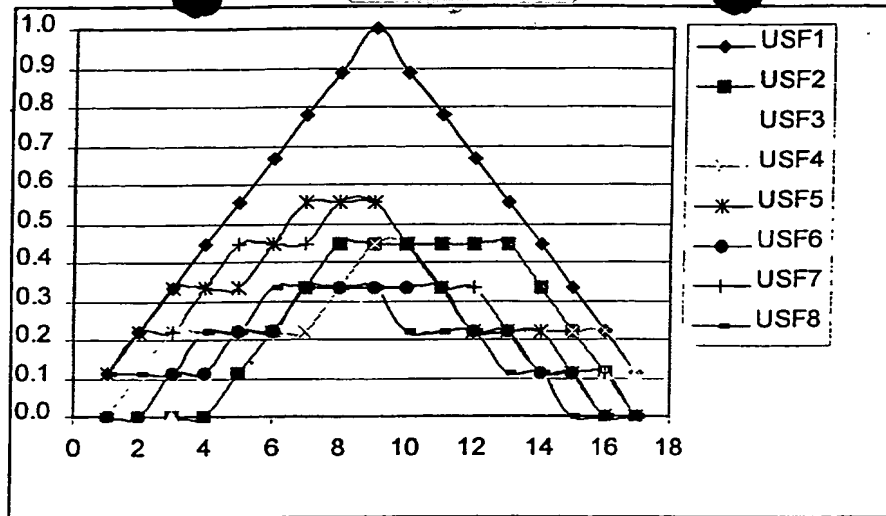


FIG. 3a

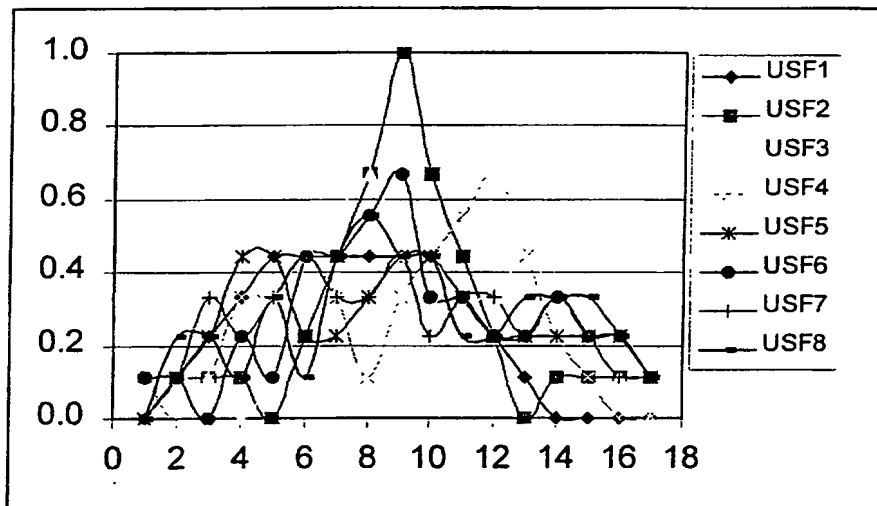


FIG. 3b


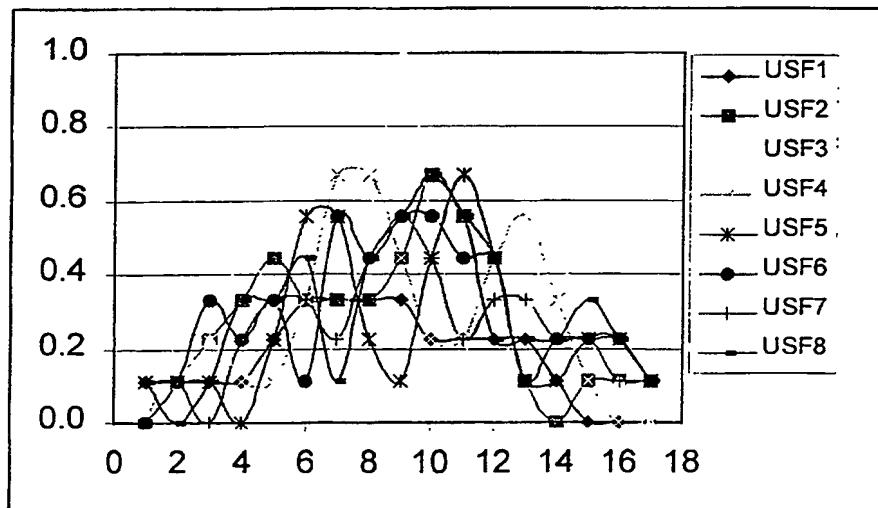


FIG. 3c

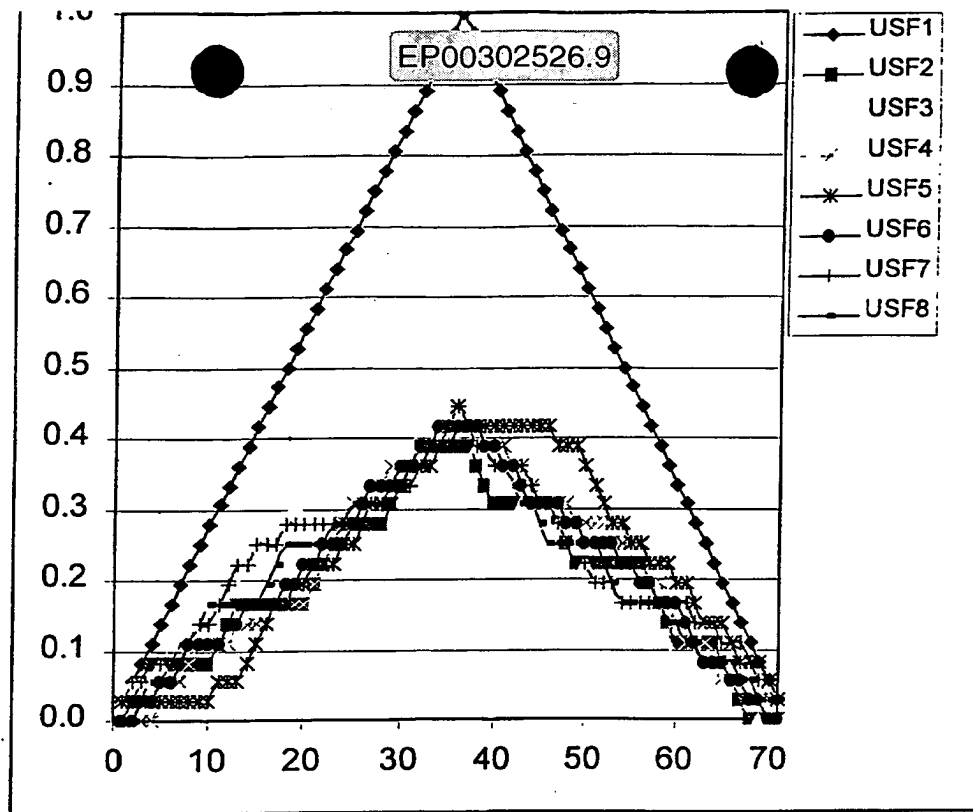

DRAW

FIG-4

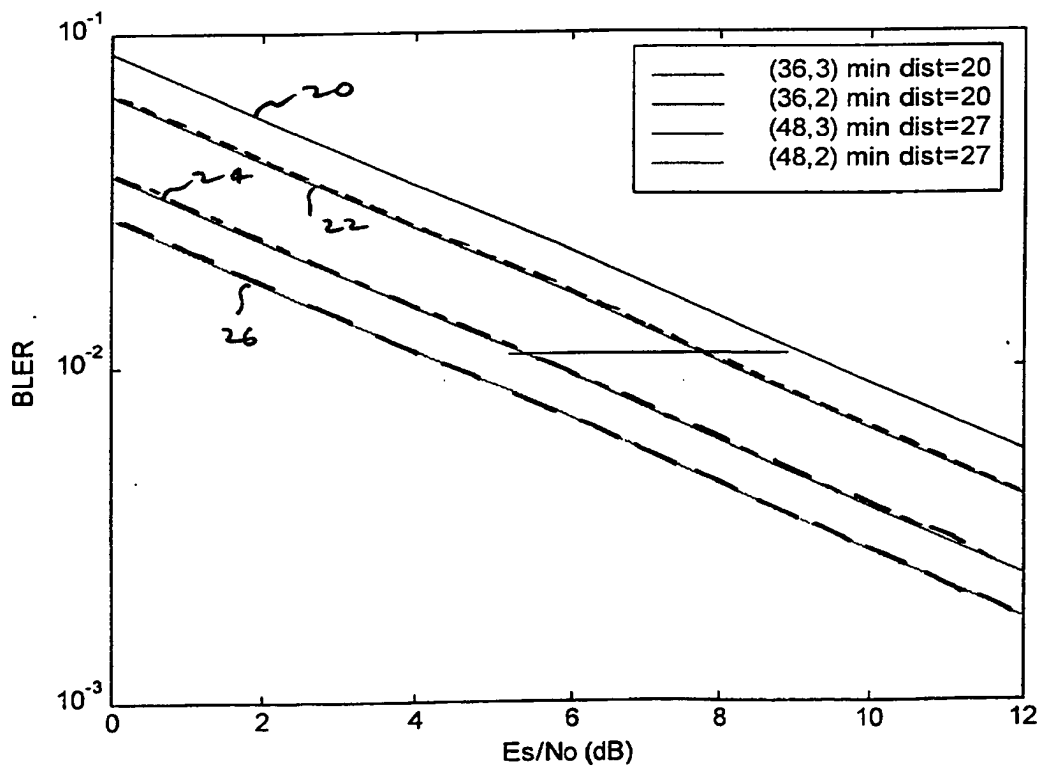


FIG-5

This Page Blank (uspto)